


# Solid State Relay



# SDD

DC Control DC

## MAIN FEATURES


- DC Voltage Drive DC loading SSR
- High Stable Reliability
- Non Switching Sparks
- Non Noise
- Non Mechanical Contact
- Low control Power Consumption
- High Speed Reaction

## APPLICATIONS


- Industrial Control Systems
- Lighting Systems
- Vending Machines
- Production Systems
- Temperature Control Systems
- Electronics Home Appliances
- Medical Equipment
- Conveying Systems



## ORDERING INFORMATION

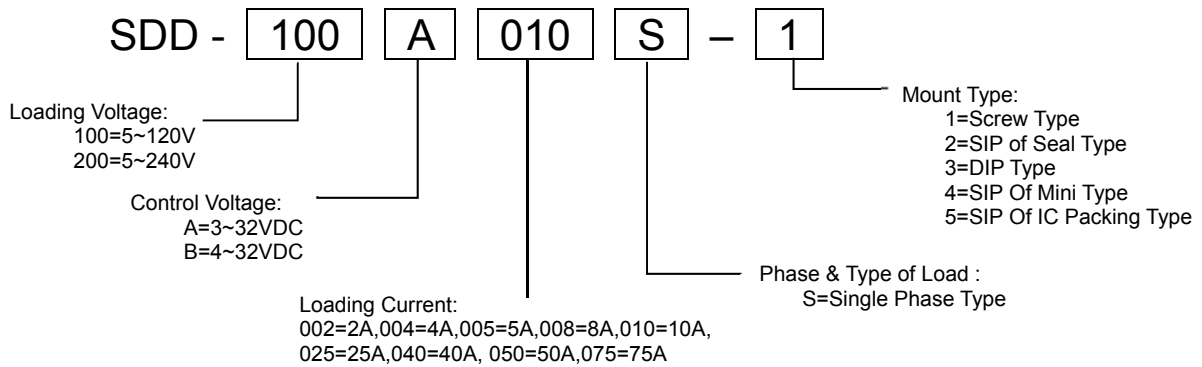

## OUTLINE DIMENSION (unit:mm)




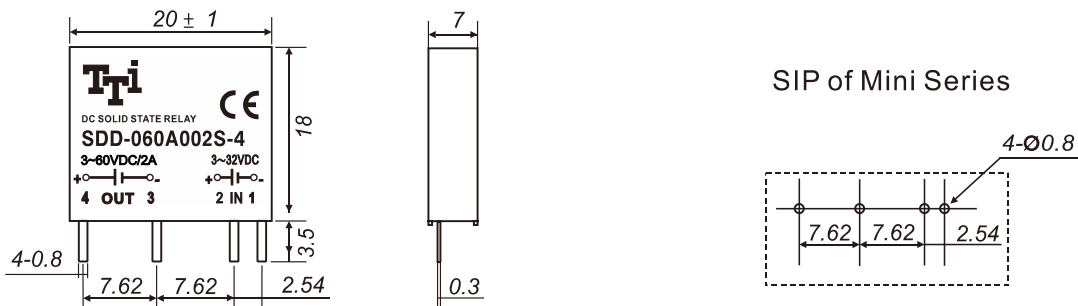


# Solid State Relay


## PECIFICATIONS

<b>MODEL NO.</b>		SDD-060A002S-4
<b>MOUNT TYPE</b>		SIP of Mini Type
<b>PHASE</b>		Single Phase
<b>TYPE OF LOAD</b>		NA
<b>INPUT</b>	<b>Control Voltage Range</b>	3~32VDC
	<b>Must Turn Off Voltage</b>	MAX. 10VDC
	<b>Input Impedance</b>	1.5 K $\Omega$
<b>OUTPUT</b>	<b>Max. Load Current</b>	2A
	<b>Load Voltage Range</b>	3~60VDC
	<b>Min. Blocking Voltage</b>	80A
	<b>Max. Off-State Leakage</b>	Less 1mA
	<b>Max.1 cycle Peak Surge</b>	20A
	<b>Max. Off State dv/dt</b>	200V/ $\mu$ sec
<b>GENERAL RATING</b>	<b>Isolate Impedance</b>	1G $\Omega$
	<b>Dielectric Strength</b>	2500VAC
	<b>Input-Output</b>	—
	<b>Input , Output-Case</b>	—
	<b>Turn On Time</b>	Less 2 ms
	<b>Turn Off Time</b>	Less 2 ms
	<b>Frequency Range</b>	47~70Hz
	<b>Operating Temperature</b>	-20~+80 $^{\circ}$ C
<b>Switching Type</b>	NA	
<b>Weight (g)</b>		6g
<b>Compliance</b>		CE , RoHS

## CHARACTERISTIC CURVES

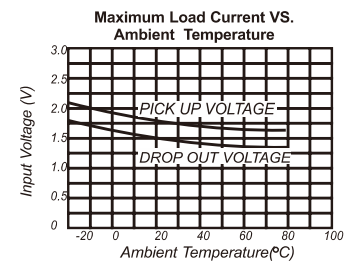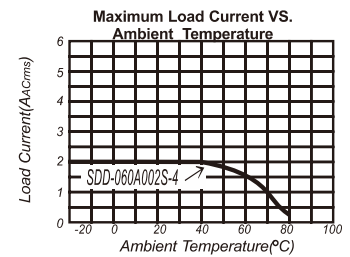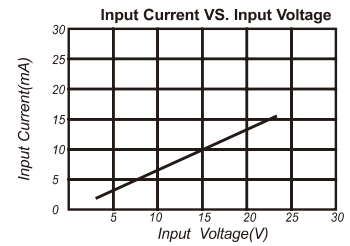

## EQUIVALENT CIRCUIT

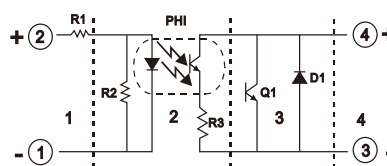

1. Input Circuit
2. Photo Detector
3. Protected Circuit
4. Output Circuit